

# UHF Radio **HX-DU1603D**



Harxon HX-DU1603D is an UHF external radio that designed for easy mobile use in demanding field conditions for wireless data communication between 410 and 470MHz with channel spacing selectable to be in 12.5 or 25 kHz. This lightweight transceiver is equipped with an OLED display, menu operation enabled and low power consumption, interference detection, remote control, great receiving performance, which can be widely used as a way of wireless correction data transmission in applications of GNSS/RTK surveying, GNSS precise positioning system and autonomous guidance of agricultural machinery.



## COMPATIBLE WITH MAINSTREAM RADIO PROTOCOLS

The HX-DU1603D is compatible with mainstream radio protocols on the market, including Trans EOT, TrimTalk450S, TrimMark3, SATEL, and also other industrial manufacturer's radio protocols(optional).

## SUPPORT MULTI-MODE DATA TRANSMIT

The HX-DU1603D support RS232 serial port and Bluetooth wireless technology for data transmission. As a wireless data transmission method, this radio could be integrated into outdoor base station as external radio and provide convenience for surveyors in various application environments.

## OLED DISPLAY FOR RADIO OPERATION CONFIGURATION

This radio support users to easily setting up radio parameters or inquire radio status via local display. Users could setting and switching serial port baud rate, and channels without reaching a computer or other terminals.

## VERSATILE FEATURES WITH RELIABLE PERFORMANCE

This small, lightweight radio provides reliable operation with sophisticated features as compact single board structure, high/ low power switching, serial port baud rate switching, air baud rate switching, starting-up status identification, interference detection, and remote control. Besides, the radio embeds a 5800mAh battery that supports 8-hour long operation endurance in the field without charging. All of these advantages make it versatile and easy to be used for a wide variety of applications.

## KEY FEATURES

- Support Air Baud Rate Switching: 19200bps, 9600bps
- Support Serial Port Baud Rate Self-adaptation: 115200bps, 57600bps, 38400bps, 19200bps, 9600bps
- Compatible with Multiple Radio Protocols: SATEL(9600bps,19200bps) ,Trans EOT (9600bps),TrimTalk450S(9600bps), TrimMark3(19200bps)
- Support Online Firmware Update
- Support High/ Low Power Switch
- IP67 Ingress Protection Rating

# UHF Radio HX-DU1603D

## General Specification

<b>Frequency Range</b>	410~470MHz
<b>Operating Mode</b>	Half-duplex
<b>Channel Spacing</b>	25KHz/12.5KHz
<b>Modulation Type</b>	GMSK/4FSK
<b>Channels</b>	36(programmable)
<b>Operation Voltage</b>	9~36V
<b>Power Consumption(typical)</b>	
High power	7.5W@12V DC
Low Power	4.0W@12V DC
Standby	1.2W@12V DC
<b>Frequency Stability</b>	≤±1.0ppm

## Structural Specification

<b>Size</b>	147.6L×83W×31.5H mm
<b>Weight</b>	Approx. 612g
<b>Antenna Interface</b>	TNC Female
<b>Antenna Interface Impedance</b>	50ohm
<b>Data Interface</b>	LEMO 5pin

## Modem

<b>Air Baud Rate</b>	9600bps / 19200bps
<b>Serial Port Baud</b>	9600bps / 19200bps
	38400bps / 115200bps

## Transmitter

<b>RF Output Power</b>	410~470MHz
High Power (2.0W)	33.5±1.0dBm@DC 12V
Low Power (0.5W)	27.5±1.0dBm@DC 12V
<b>Power Stability</b>	±1dB
<b>Adjacent Channel Power</b>	>50dB@25KHz

## Receiver

<b>Sensitivity</b>	-115dBm@BER 10 <sup>-5</sup> , 9600bps
<b>Co-channel Rejection</b>	>-12dB

## Radio Battery

<b>Battery</b>	Cylindrical Li-ion battery pack
<b>Model</b>	INR18650F1L 7.26V 6700mAh-2S2P
<b>Rating</b>	12V, 6700mAh, 48.642Wh

## Battery External Operation Environment


<b>Temperature(operation)</b>	-0°C~+55°C
<b>Temperature(storage)</b>	-20°C~+60°C

### en.harxon.com

sales@harxon.com  
9/F, Block B, Building D3, TCL International  
E City, NO.1001 Zhongshanyuan Road,  
Nanshan District, Shenzhen, China  
Tel: +86-755-26989948  
Fax: +86-755-26989994


**Version 3** Specifications subject to change without notice.  
©2022Harxon Corporation. All rights reserved.  
Printed in China  
October 2022

## Structure Diagram(mm)

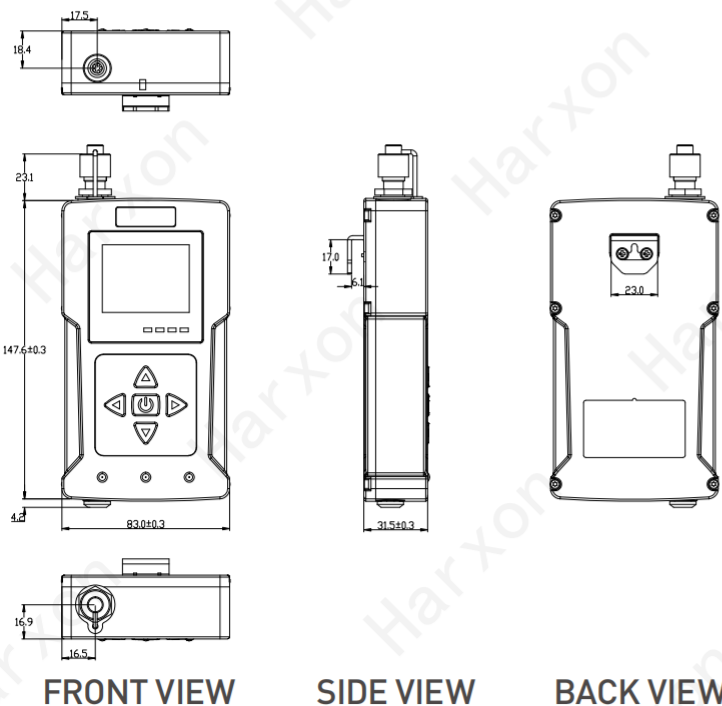

Undeclared Tolerance:±0.3mm

## Interface Pin Definition



Interface type: asynchronous serial communication standard of RS232

Pin definitions:

- Pin 1-----Power GND
- Pin 2-----Serial port signal ground
- Pin 3-----Power 9-36V DC;
- Pin 4-----Serial port data transmission, TXD
- Pin 5-----Serial port data receiving, RXD

Note: Supply voltage not over 36V.